

myPhone



myPhone



**DUAL SIM**  
technology

6651

# Contents

<b>Use and Care</b> .....	<b>4</b>
Install the SIM card .....	6
Battery Use and Installation .....	7
Memory Card .....	9
Turn it on/off .....	9
Make a call .....	10
Answer or Reject a call .....	10
Operation during a call .....	10
Insert international access code .....	11
Dial a extension or voicemail number .....	11
Emergency calls .....	11
Keypad lock .....	15
Password .....	15
<b>Phonebook</b> .....	<b>15</b>
Search .....	15
Add .....	16
Copy all .....	16
Delete .....	17
Groups .....	17
Extra Numbers .....	17
Settings .....	17
Call Summary .....	17
Call history .....	18
<b>Messages</b> .....	<b>20</b>
SMS .....	20
MMS.....	23
Chat.....	26
Voice messages.....	27
Info messages.....	27
<b>MultiMedia</b> .....	<b>28</b>
Camera.....	28
Music Player.....	28
Media Player.....	29
Voice Recorder.....	29
FM Radio.....	30
<b>File manager</b> .....	<b>31</b>
<b>Settings</b> .....	<b>32</b>
Dual SIM Settings.....	32
User Profiles.....	32

Phone Setup.....	33
Network Setup.....	34
Security Setup.....	34
Restore Factory Settings.....	35
<b>Organizer.....</b>	<b>35</b>
Torch.....	35
Calendar.....	35
To do.....	35
Alarm.....	36
Calculator.....	36
Unit converter.....	36
Currency converter.....	36
Stopwatch.....	37
Bluetooth.....	37
<b>Fun &amp; Games.....</b>	<b>38</b>
Games.....	38
<b>Services.....</b>	<b>38</b>
WAP.....	38

World Wide Web  
[www.myphone-mobile.com](http://www.myphone-mobile.com)

## Use and Care

First of all, read this simple guideline. Breaking the rules may be dangerous or illegal.



### Any kind of fluid

Keep the device away from water, rain, humidity, sweat or other moisture.



### Extreme heat or cold

Avoid the temperature below  $-10^{\circ}\text{C}/14^{\circ}\text{C}$  or above  $45^{\circ}\text{C}/113^{\circ}\text{C}$ .



### Microwave

Don't try to dry your phone in a microwave oven.



### Dust and dirt

Don't expose your phone to dust, dirt, sand, food or other inappropriate materials.



### Cleaning solutions

Use only a dry soft cloth to clean your phone. Don't use alcohol or other cleaning solutions.



### Ground

Don't drop your phone.

## **LACK OF RISK**

Do not switch the phone on when phone use may cause interference or danger and when phone use is prohibited.

## **MOST IMPORTANT – ROAD SAFETY**

Do not use hand – held phone while driving.

## **INTERFERENCE**

All wireless handsets may get interference, which could affect performance.

## **SWITCH OFF ZONES**

Do not use phone at a refuelling point.

Do not use near fuel or chemicals.

Do not use phone in aircraft. Wireless can cause interference in aircraft.

Switch the phone off near medical equipment.

## **PROFRSSIONAL SERVICE**

Only qualified personnel may install or repair phone and phone equipment.

## **BATERIES AND ACCESSORIES**

Use only approved batteries and accessories. Do not connect incompatible product.

## **WATER – RESISTANCE**

Keep your telephone dry. Phone is not water – resistant.

## **\*Attention:**

The items supplied with your device may vary depending on the software and accessories available in your region or offered by your service provider. You can obtain additional accessories from your local myPhone dealer.

## **World Wide Web**

[www.myphone-mobile.com](http://www.myphone-mobile.com)

## Essential

### Install the SIM card

Keep your SIM cards away from the children.


Please consult your SIM card franchiser about the services and usage. SIM franchiser can be the service provider, network provider or other franchisers.

Please turn off your mobile device and disconnect it with charger before removing the battery.

**\*Note:** turn off your mobile device and disconnect it with charger or any other device before removing battery door. Place the door on the phone before store and use your mobile phone.


#### 1. Remove the battery door:

Press and jog the battery door let it glide to the top of the phone, then get the battery door off.

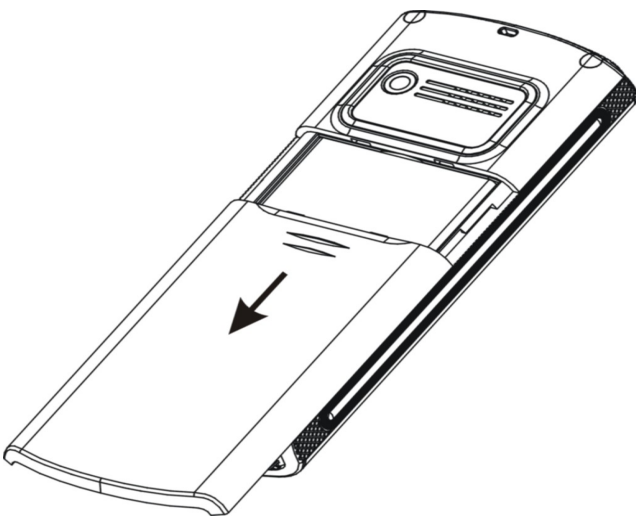

#### 2. Insert the SIM card into the card slot:

Now you can see two card slots side by side, please insert the SIM cards with the right direction bases the chart.

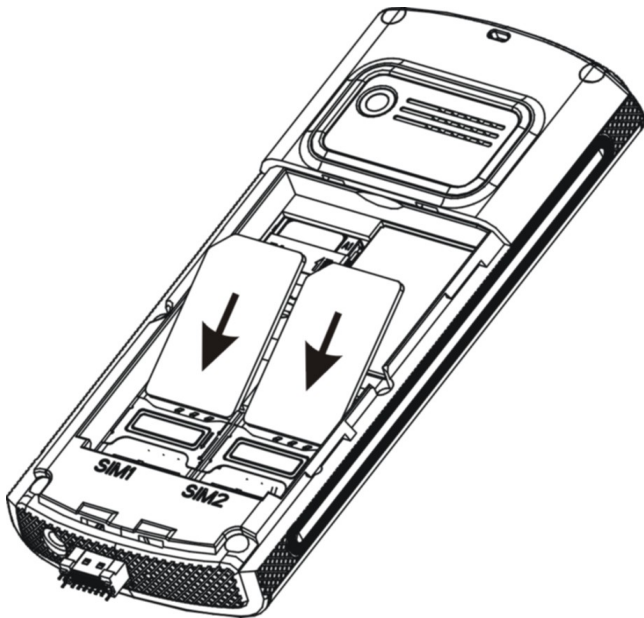

## Battery Use and Installation

### Battery tips

Battery life depends on the network, signal strength, temperature, and accessories you use.

Always use Original batteries and chargers. The warranty does not cover damage caused by non-original batteries, charger and/or accessories.

New batteries or batteries stored for a long time may take more time to charge

When charging your battery, keep it near room temperature.

When storing your battery, keep it uncharged in a cool, dark, dry place.

Never expose batteries to temperatures below  $-10^{\circ}\text{C}$  ( $14^{\circ}\text{F}$ ) or above  $45^{\circ}\text{C}$  ( $113^{\circ}\text{F}$ ).

Always take your phone with you when you leave your vehicle.


It is normal for batteries to gradually wear down and require longer charging times.

If you notice a change in your battery life, it is probably time to purchase a new battery.


Never dispose of batteries in a fire because they may explode.

## Battery installation

1. Slide the battery door up and then remove the door.

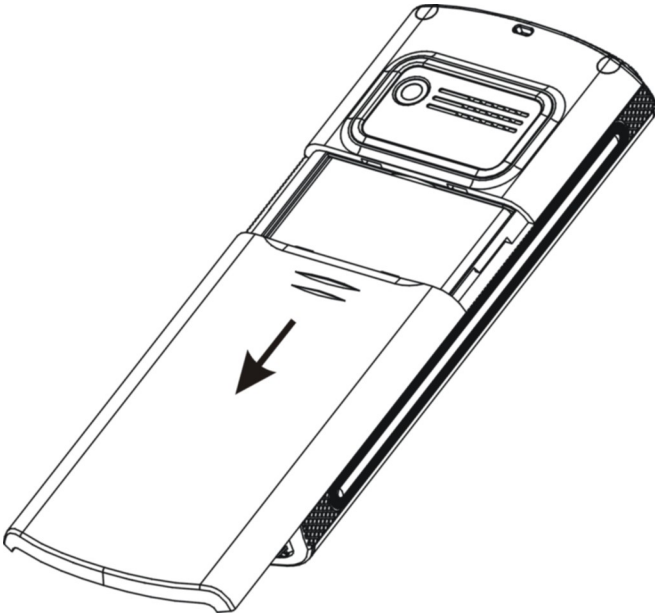

2. Aim the metal terminals of the battery at those in the battery compartment and then push down and into it.

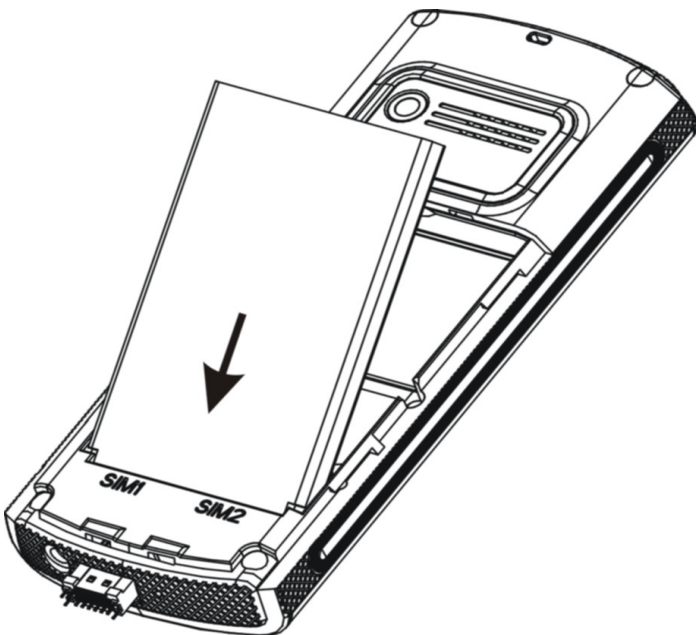

## Battery charging

New batteries are not fully charged. Open the protective cover on your phone's accessory connector port, then insert the battery charger plug into the accessory


connector port on the side of your phone as shown, and plug the other end into an electrical outlet. Your phone might require several hours to charge fully. When your phone is power off, it might take a few seconds to show charging display and it shows charge complete when finished. When your phone is power on, the battery icon flickers when it starting charging and become still with full bars in battery icon when finished.

## Memory Card

You can use removable memory card with your phone to store information.

**\*Caution:** Don't bend or scratch your memory card. Keep it away from static electricity, water, and dirt.

Insert the memory card into the tray as shown below:

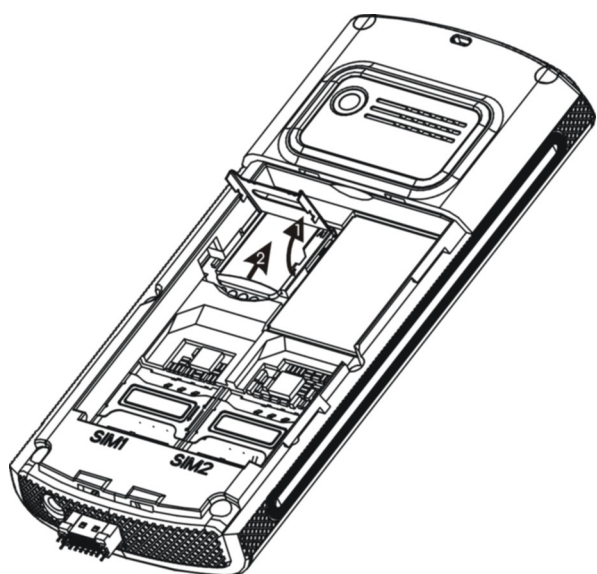

## Turn it on/off

**\*Caution:** On power up, the phone may prompt you to enter your SIM card PIN code to unlock the SIM card. If your phone shows Input PUK code that express your SIM card is locked, please contact your web service provider.

To turn on your phone, press and hold the power on/off key for two seconds. If prompted, enter your four-to-eight-digit SIM card PIN code and/or four-digit unlock code.

If you don't insert a SIM card, your phone shows ***Insert SIM***. None of the functions

related to SIM card can be used and you can make an emergency call only. To turn off your phone, press and hold the power on/off key for two seconds.

## Make a call

1. Under the sleep mode, input the telephone number directly.
2. After calling, press the power on/off key or end key to end.

## Answer or Reject a call

When there is an incoming call, the phone rings and /or vibrates showing the number or the corresponding name.

Now the phone provide three mode,

**Not any key(set in profiles):** Press **answer key** or enter **option** and then select **answer** to receive a call. If you don't want to answer, you can press the power on/off key or right soft key.

**Any key:** Except power on/off key and right soft key, press any key to answer a call.

**Earphone/Bluetooth mode:** when plugging the earphone(including bluetooth earphone), you can answer a call by pressing the key on the earphone; when you are not convenient to press the key, you can turn on the auto-answer mode (only in earphone mode) and make sure the earphone is plugged, your phone auto-answers a call 5 seconds after it rings and/or vibrates.

## Operation during a call

Press **Option** to perform following operation during a call:

**Hold:** Hold this call

**End:** Hang up and end this call

**New Call\*:** Enter a new dialing display to make a new call

**Phone Book:** Enter the phone book

**SMS:** Enter messages

**Mute:** Set mute on or off. When setting mute on, your voice can not be

heard through the line.

**Swap\***: Switch between the current call and the holding call

**Conference\***: You can add additional parties to a call.

**\*Note**: the menus marked with \* must be supported by your SIM card. For details, please contact your service provider. Only when two or more calls are on can **Swap** and **Conference** show.

## Insert international access code

When you are dialing an international call, keep press \* **key** till the international call prefix „+” shows and then enter the number in the following order:

„+” Country code complete number send key

## Dial a extension or voicemail number

You need to enter P (pause) or W (wait) when dialing an extension number, keep press \* **key** to switch between ‘P’ and ‘W’. You can enter numbers as following:

District code exchange phone number P or W extension number send key

## Emergency calls


You can make emergency calls as long as your current location is network-covered which you can know by checking the signal strength bar showing on the top left corner of the screen.

**\*Note**: Emergency numbers vary by country. The emergency number(s) in your phone may not work in all locations, and sometimes an emergency call cannot be placed due to network, environmental, or interference issues.

## Basic



## Display

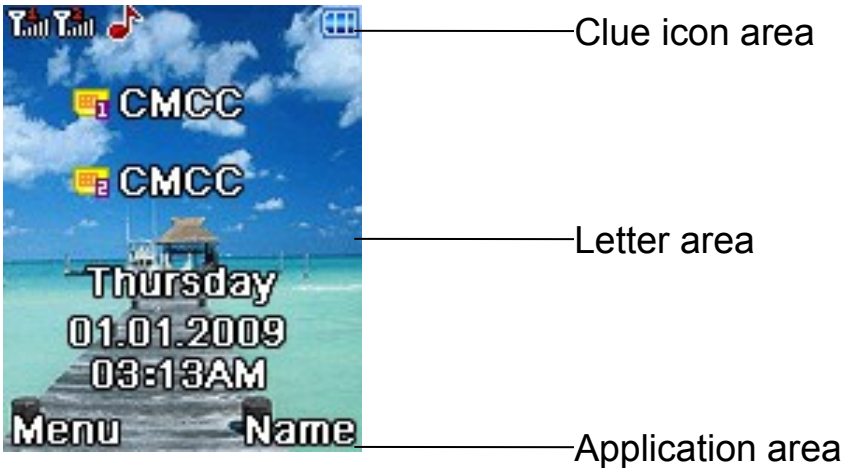







The idle shows when you turn your phone on:







The idle mainly includes Clue icon area, Letter area, and Application area.

## Clue icon area

	<p><b>Signal Strength</b></p> <p>The vertical bars show the network connection strength.</p> <p>SIM 1 signal, SIM 2 is unused;</p> <p>SIM 1 and 2 signals.</p>
	<p><b>New messages</b></p> <p>This icon shows when you receive a new message.</p> <p>Card 1 has an unread message;</p> <p>Card 2 has an unread message.</p> <p><b>The inbox is full.</b></p> <p>This icon flickers when the inbox is full and you need to delete messages to receive new messages.</p>
	<p><b>New Media Messages</b></p> <p>This icon shows when you receive a new media message.</p> <p>Card 1 has an unread media message;</p>

	<p>Card 2 has an unread media message.</p>
	<p><b>Chatroom</b></p> <p>This icon shows when chatroom is active.</p> <p>Chatroom 1 is in use;</p> <p>Chatroom 2 is in use.</p>
	<p><b>Earphone</b></p> <p>This icon shows when you plug the earphone in. Voice will be heard from the earphone.</p>
	<p><b>Alert Type</b></p> <p><b>Your current alert type:</b></p> <p>Ring</p> <p>Vibra</p> <p>Vibra then ring</p> <p>Vibra and ring</p> <p>This icon shows when you divert all calls unconditionally.</p>
	<p><b>Missed calls</b></p> <p>This icon shows when you are viewing the missed call.</p> <p>Card 1 has a missed call;</p> <p>Card 2 has a missed call.</p>
	<p><b>Call Divert</b></p> <p>This icon shows when you divert all calls unconditionally.</p> <p>Card 1 has set up call divert ;</p> <p>Card 2 has set up call divert .</p>
	<p><b>Keypad Lock</b></p> <p>The different icon shows the current state of your keypad.</p> <p>Keypad locked -- currently the keypad is in a locked state, the keystroke is of no use;</p>
	<p><b>Turn alarm on</b></p> <p>This icon shows when you turn alarm on.</p>

	<p><b>Roaming</b></p> <p>This icon shows when your phone is in roaming state.</p> <p>Card 1 is roaming;</p> <p>Card 2 is roaming.</p>
	<p><b>Bluetooth</b></p> <p>This icon shows when the Bluetooth is active.</p>
	<p><b>Stopwatch</b></p> <p>This icon shows when stopwatch is being used.</p>
	<p><b>Battery Capacity</b></p> <p>This icon's color shows the status of battery capacity.</p>

## Letter Area

In the area, you can see the following contents:

<b>Operator Name</b>	<p>Showing the status of 2 SIM cards respectively, mainly the network operator's name and SIM card's current state etc.</p> <p>Exceptionally, please carry the correct operation according to the hints. For example, show that the "emergency call", said you can only make an emergency call.</p>
<b>Song Name</b>	Show the name your music player works.
<b>Owner Number</b>	Show the SIM number your phone records.
<b>Time and Date</b>	Show the time and date of your phone.

**\*Tips:** You can choose whether show the date and owner number through the menu of settings by your need.

## Functional Key Areas

This area show you that the corresponding operation of the left and right functional key. For

example, the standby interface shows: **Menu** means press **left key** to enter the main menu to choose the interface; **Name** means that press **right functional key**

to check the linkman list.

**\*Tips:** When you enter the main menu to process, please check the names corresponding to left and right keys, and then carry the corresponding operations.

## Keypad lock

You can let the keyboard and screen to be locked after long time unused through the phone setting. On the top state can show the keyboard was locked. When need to open, due to press any key, it will appear adjust icon, clew ***Open the Keyboard Lock***, you can use your phone normally.

## Password

The password of your phone is originally set to be **1234**. You can change it whenever you like. You can also change your SIM card password or barred dial password but you need to contact your service provider to change them.

**\*Note:** For details please contact your service provider.

## Phonebook

Select ***Phonebook*** from main menu to open phone book.

The phone book consists of phone storage and SIM card storage and you can use both of them.

**Phone Storage:** With a name, default number, family number, company name, email address, company number, fax number and group/individual ring in each item.

**SIM card Storage:** The capacity depends on your SIM card type and there is only a name and one default number in each item. For details, please contact your service provider.

## Search

Choose the ***Search*** in the ***Phonebook***, input the name want to search, then

through the **Option-Search** menu to lookup the item qualifying in the phonebook. You can directly call one number by pressing **send key** in phone book screen and you can also press **option** to make following operations:

- SIM 1 Dial**      Use card 1 to call the item
- SIM 2 Dial**      Use card 2 to call the item
- Send SMS**        Send messages to the item.
- View**              View all the information about the name.
- Edit**              Edit the information of the name.
- Delete**            Delete the record.
- Copy**              Copy the names stored in the phone storage/SIM card storage to the SIM card storage/phone storage (copy between the two storages).
- Move**              Move the names stored in the phone storage/SIM card storage to the SIM card storage/phone storage (Move between the two storages).

## **Add**

You can add new names in your phonebook by this function and save to the phone storage or SIM 1 and SIM 2 storage.

Only names and call numbers can be added when you add new contact to SIM card storage.

If you choose phone storage, beside names, numbers, family numbers, company numbers, fax numbers, company names, email address, you can add corresponding picture and set group/individual incoming call ring as well.

## **Copy all**

You can copy all the names stored in SIM 1/SIM 2 to phone or copy all the names in phone storage to SIM 1/SIM 2, copy between the two SIM cards as well.

**\*Note:** When copy the names stored in the phone storage to SIM card, only names and default numbers can be saved.

## Delete

You can do following operation:

<b>From SIM 1</b>	Delete all the names stored in SIM 1
<b>From SIM 2</b>	Delete all the names stored in SIM 2
<b>From Phone</b>	Delete all the names stored in the phone storage
<b>One By One</b>	Delete the selected names one by one

## Groups

There are 5 caller groups in your phone and you can set the group name, group incoming call ring and group members as you like.

## Extra Numbers

**Owner Number, Service Dial Number, SOS Number** etc. can be set respectively for SIM 1 and SIM 2 in this menu.

**\*Note:** this feature must be supported by your SIM card. For details please contact your service provider.

## Settings

You can perform following operations on the phonebook:

**Memory Status** Check the capacity of the phonebook, including two SIM cards memory and phone memory.

**Preferred Storage** Select SIM card memory or phone memory as the default storage location when adding a new name.

**Fields** Select the items of information that the vCard shows

**\*Tip:** You can also choose another storage location when you add a new name.

## Call Summary

Enter the main menu **Call Summary**, You can perform following operations to the two SIM cards in this menu.

## Call history

You can view the log, related information and corresponding operations. After entering the menu, select the information of SIM card you need---log of SIM 1/SIM 2, then details will be listed.

Your phone keeps lists of incoming and outgoing calls, even for calls that didn't connect. The most recent calls are listed first.

**\*Tip:** The phone keeps the only latest call of the same number.

Find the lists of ***Dialed Calls***, ***Received Calls***, ***Missed Calls***

Press **OK** key to view the detail information: date, time and times etc.

press **Option** key to perform following operation:

<b>Delete</b>	Delete this record.
<b>Save to Phone Book</b>	Save the number of this record to phone book.
<b>Dial</b>	Dial the number of this record.
<b>Edit</b>	Enter the number edit screen, you can modify, save or dial the number.

## Delete call log

You can delete the all the records of the missed calls, dialed calls and answered calls, you can also choose delete all to delete all the records of the three parts.

## Call timers

You can examine the call time record of the phone up to now through the menu.

<b>Last Call</b>	Show the last call time.
<b>Dialed Calls</b>	Show the dialed calls time.
<b>Received Calls</b>	Show the answered calls time.
<b>Reset All Time</b>	Reset the last call time, total dialed time and total inhale time.

## Call cost

You can examine the call cost of the phone up to now through the menu.

<b>Last Call Cost</b>	Examine the last time call cost.
-----------------------	----------------------------------

- Total Cost** Examine all the calls' cost.
- Reset Cost** Input the PIN2 code, and then can cleanup all the cost.
- Max Cost** Show the limitation of the currently cost, "0" means no limit.
- Price Per Unit** Press setting to setup the unit time rates.

**\*Note:** The call cost function must be supported by the network service provider. Reset the cost, setup the maximum cost and rates need to input the PIN2 code, please connect with your network provider to gain the password.

## SMS counter

You can examine the number of the sent and received SMS currently; **Reset** to clear the records chose.

## GPRS Counter

You can examine the transmission flow when use the GPRS web, include the data flow of **last sent**, **last received**, **all sent** and **all received**. You can also reset the records through the **Reset Counter** menu.

## General Call Settings

You can perform following operations through this menu, some should be separated from settings for SIM card or for other calls. You should select call settings for SIM 1 or SIM 2 to enter the corresponding menu.

<b>Send Caller ID</b>	Input owner number or setup
<b>Call Waiting</b>	Setups the call waiting function.
<b>Call Divert</b>	Setups the call divert function.
<b>Call Barring</b>	Setups the call barring function.
<b>Line Switching</b>	Switch your current line and there are 2 lines available

## Black list

When this function is active, the incoming calls in the black list will be shielded automatically.

- Mode** Switch on/off this function
- Black list number** Enter the number in the black list

## Speed dials

Set the number corresponding to the numeric keys from 2 to 8, when switch on this function, long press the numeric keys to give calls in idle screen.

**Enable/disable** Switch On/Off this function;

**Set number** Set the number corresponding to the numeric keys from 2 to 8, numbers must be in the phone book.

## Messages

You can receive and send messages and MMS including Multimedia Information, include photos, pictures, music and text. And can also use broadcast message and voice mail box. All the service is web service and need web supporter. Please contact the provider before using.

Messages make it possible for you to exchange messages with other wireless phone users. Enter main menu from idle and then select **Message** to perform operation.

## SMS

You can enter the **SMS** menu through the **Message**.

## Writing Messages

You can write a new text message send to others, and also can insert template in the message. When finished, you can select SIM 1 or SIM 2 to perform following operations:

**Option** after editing a text message:

**Send** Send the message

**Send and Save** Save the message while sending



**Save** Save the message

**Send to Many** Send the message to many

**Send By Group** Send the message to all the linkmen of the select group

## Inbox



After entering the inbox menu, you need to select SIM card Inbox for SIM 1/SIM 2, then you can perform following operations.

The Inbox is for storing received messages. Depending on the selected mode, the phone vibrates or rings when you get a new message with screen showing the new message icon and prompt lights flickering. After you go back to idle,  or  shows on the top of the status bar till you read the new message.

While reading a message, you can perform following operations:

- Reply:** Reply a message to the sender;
- Delete:** Delete this message;
- Edit:** Edit this message;
- Forward:** Send this message to somebody else;
- Copy to Phone\*:** Copy the message from SIM card to the phone memory;
- Copy to SIM\*:** Copy the message from phone memory to SIM card memory;
- Move to Phone\*:** Move the message from SIM card to the phone memory;
- Move to SIM\*:** Move the message from phone memory to SIM card memory;
- Delete All:** Delete all the messages in the inbox;
- Copy All:** Copy all the messages from SIM card or phone memory to phone memory or SIM Card;
- Move All:** Move all the messages from SIM card or phone memory to phone memory or SIM Card;
- Use Number:** Extract the number from this message and perform operation on it
- Use URL:** Extract the link from this message and operation on it;

**\*Tip:** the menus marked with\* may not appear depending on the storage location in use.

**\*Note:**  or  keeps flickering in idle when your inbox is full. Please delete some messages to receive new messages.

## Outbox

After entering the outbox menu, you need to select SIM card—outbox for card 1/card 2, then you can perform following operations.

Enter outbox to view the sent messages that you saved and you can perform following operation:

- Send:** Send this message to one contact person;
- Edit:** Edit this message;
- Delete:** Delete this message;
- Copy to Phone\*:** Copy the message from SIM card to the phone memory;
- Copy to SIM\*:** Copy the message from phone memory to SIM card memory;
- Move to Phone\*:** Move the message from SIM card to the phone memory;
- Move to SIM\*:** Move the message from phone memory to SIM card memory;
- Delete all:** Delete all the messages in outbox;
- Copy All:** Copy all the messages from SIM card or phone memory to phone memory or SIM Card;
- Move All:** Move all the messages from SIM card or phone memory to phone memory or SIM Card;
- Use Number:** Extract the number from this message and perform operation on it;
- Use URL:** Extract the link from this message and operation on it.

## Template

The phone provides you 10 groups of templates, including text message and multimedia message etc. you can use the template by your need.

## Message Settings

After entering this menu, you need to select SIM card—message setting for card 1/card 2, then you can perform following operations.

You can setup the message from the menu, as following:

**Profile Setting:** Offer you four profiles and you can edit their names, set SC Address and Valid Period etc.;

**Common Setting:** Set delivery report on or off;

**Memory Status:** Check the capacity of messages storage;

**Preferred Storage:** Set the default message storage location, including phone storage and SIM card.

**\*Note:** you need support from the service provider to receiver delivery reports.

## MMS

### Create message

**Option** after editing the MMS:

Complete	Confirmed the editing completed.
Input Method	Input method used when editing the text message.

When editing multimedia message, you can see the following options: recipient, copied, send secretly, topic, content etc.

Input the corresponding address in the recipient, copied or send secretly items, then press the

**Complete** to operate the following operation:

<b>Send</b>	Send the multimedia message currently edit and select the SIM card.
<b>Save and Send</b>	Save the multimedia message currently edit and send.
<b>Save to Draft box</b>	Save the multimedia message currently edit to the draft box.
<b>Send Option</b>	Setup contents for the editing multimedia message.
<b>Withdraw</b>	Withdraw the editing interface and do not save the message.

Against the recipient, copied or send secretly, can press the **option** key after

editing to operate the following operations:



<b>Add Number</b>	Add the number of the multimedia message recipient.
<b>Add E-mail</b>	Add the E-mail of the multimedia message recipient.
<b>Edit</b>	Edit the recipient selected.
<b>Delete</b>	Delete the number from the recipient list.
<b>Delete All</b>	Delete all the numbers in the recipient list.

Against the content of the multimedia message, press the **option** when to operate the following operations:

<b>Complete</b>	Confirm to complete the editor of the content.
<b>Input Method</b>	Select the input method current used, also can press # key to change under the editing interface.
<b>Add Photo</b>	Add the selected photo files at the current editing cursor.
<b>Add Music</b>	Add the selected music files at the current editing cursor.
<b>Add Video</b>	Add the selected video files at current editing cursor.
<b>Add Extra</b>	Add extra files to the multimedia message.

**\*Note:** If your MMS can not send successfully, please reset the corresponding setting of the MMS. Exact operation is: Setting-MMS Setting-Servers Setting, please change the online-pattern to the WAP.

## Inbox

The Inbox is for storing received MMS. Depending on the selected mode, the phone vibrates or rings when you get a new MMS with screen showing the new message icon and prompt lights flickering. After you go back to idle,  or  shows on the top of the status bar till you read the new MMS.

Against the MMS in the inbox, you can operate the following operations:

<b>View</b>	View the MMS
<b>Details</b>	View the details of the message
<b>MMS Reply</b>	Edit MMS to reply the sender or all
<b>Message Reply</b>	Edit message to the sender
<b>Reply ALL</b>	Edit MMS to reply the sender or all
<b>Forward</b>	Edit the corresponding information including the recipient,

address of the current MMS then send to other

**Delete** Delete the MMS

**Delete All** Delete all the MMS in the inbox

**Use Item** Extract the number or hyperlink from the message, and you can dial, save the number; you can connect or add bookmarks for the hyperlink.

## Outbox

Enter outbox to view the MMS that you saved and you can perform following operation:

**View** View the MMS

**Details** View the details of the MMS

**Forward** Edit the corresponding information including recipient, address of the MMS then send to others

**Edit** Modify the current MMS

**Delete** Delete the MMS

**Delete All** Delete all the MMS in the outbox

**Use Item** Extract the number or hyperlink from the message, and you can dial, save the number; you can connect or add bookmarks for the hyperlink.

## Draft Box

Storage the messages you save when you edit.

You can perform following operation to the MMS stored:

**Examine** Skim over the MMS.

**Detail** Examine the detail of the MMS, including the information of recipient, carbon copy, secret copy, date, time and size etc.

**Edit** Enter the MMS edit interface.

**Send** Send the MMS again.

**Delete** Delete the MMS.

**Delete All** Delete all the MMS in the draft box.

**Use Item** Extract the number or hyperlink from the message, and you can dial, save the number; you can connect or add bookmarks for the hyperlink.

## Template

The phone provides you different templates, including text message and multimedia message etc. you can use the template by your need.

Press the template you need, you can process as following:

**Examine** Skim over the content of the template, include image and sound.

**Use** Use the template and write a new MMS meanwhile.

**Detail** Examine the details of the template.

## Message Settings

You can setup your MMS through the menu by your need as following:

**Compose** Include edit mode, Automatic Signed etc.

**Send** Include life, send return, read return, priority etc.

**Retrieve** Include main network, roaming network, send return, allow to sending reports etc.

**Filter** Include Anonymous sender, advertisement information etc.

**Server Profile** Start or edit the service, when you fail to send the MMS, please change online-pattern of the server to WAP. You must first select the SIM card.

**Memory Status** View the storage of the MMS.

**\*Note:** If you fail to send MMS, please change the online-pattern to WAP in the server setting.

## Chat

You can make instant information exchange under this menu. There are no more than two instant information rooms can be established.

First setup the chat room; you can setup my nickname and the other side number. After setting then chooses chat and finally choose the SIM card you want to use,

you can communicate with others by instant message. Through the communication, you can choose continue or end the chat.

## Voice messages

After entering the voice messages menu, you need to select the SIM card — voice messages for card 1/card 2 to perform the following operations.

The voice message is similar to a telephone recording service; when you have a missed call, it can be transferred to the voice mailbox, Let the caller left "soundtrack original flavor" oral message. When you have new oral message, your phone will receive message note promptly. And it offers you two profiles for voice mail.

**\*Note:** this function must be supported by network. For more information about this please contact your network provider.

## Info messages

After entering the info messages menu, you need to select the SIM card—info messages for card 1/card 2 to perform the following operations.

Cell Broadcast is messages sent from network operator to GSM phone users, such as weather broadcast, traffic situation, stock updates etc. every kind of Cell Broadcast has a fixed model number and the phone can automatically store it when you receive a Cell Broadcast from a new channel. The new Cell Broadcast message covers the old one if they are from the same channel.

**Receive Mode:** Select the status of the broadcast message (on or off)

**Read Message:** Read the broadcast messages

**Language:** Set the language of the broadcast messages

**Channel Setting:** Set the broadcast messages channel

**\*Note:** This function must be supported by network. For more information about this please contact your network provider.

## MultiMedia

Your phone offers multimedia applications and you can use **MultiMedia** from main menu to open it.

### Camera

Your phone has a hi-Mega pixel camera that you can take photos whenever and wherever you like. After taking photos, store them in the phone memory or memory card (if any).

### Camera Settings

Press **Option** in viewfinder display and make detail settings:

<b>Camera Settings</b>	Set the status of shutter sound, Banding,
<b>Image Settings</b>	Adjust the photo's size
<b>Scene Mode</b>	Select night or automatic mode
<b>Storage</b>	Set the storage location.
<b>Restore Default</b>	Use the default settings.

### Take a Photo

In the camera viewfinder state, there need to take the show in the frame, press the **OK key** to take a photo.

After photo graphing, select **Save** to storage the photo, then back to the view finder state; Select **Back** to give up saving and back to the view finder state.

**\*Tips:** All the photos are stored in the Photos file.

### Music Player

You can use the audio player to broadcast music. Press **OK key** to play or pause the current music, press **left key** to the before, and press **right key** to the next. You can adjust the volume of the MP3 press **down key / up key**. Press **left function key** to setup the player.

Select setup menu:

<b>Play List</b>	Select a location where the list comes from.
<b>List Auto Gen</b>	Set if the playlist automatically generates when activating the audio player.
<b>Repeat</b>	Set the repeat mode: off <input type="checkbox"/> No repeat <input type="checkbox"/> / one/all.
<b>Shuffle</b>	Set the play order: on (random)/ off (as the play-list order).
<b>Background Play</b>	If set it on, the song is played as an accompaniment.

**\*Note:** **Background Play** is not available in Sound Recorder, Camera, Video Recorder and Video Player. If you don't need Background broadcast, please suspend broadcasting then withdraw the player.

## Media Player

Choose **Media Player** to open it and view all video files. Press the **Option** and perform following operations on the selected video: play, forward, rename, delete, delete all files or sort.

During playing, press the 4-way navigation key up and down to adjust the volume, press the left or right key to control playing rate. You can press **\* key** load full screen.

## Voice Recorder

Open **Voice Recorder** to view the sound files in **AMR** or **WAV** format. If there is no file, your phone prompts **Empty**.

Press the **Option** and perform following operations on the sound file:

**Start:** start recording and during recording, you can press the pause option to pause and press again to continue. Press the stop option to stop recording and go to save display, press **Yes** to save the sound file. If you prefer not to save it, press **No** to go back.

**\*Tip:** the sound files are stored in the **Audio** file.

### ✧ **Play**

Play the selected sound file.

### ✧ **Append**

For files in AMR format, you can add a new sound recording onto the original one and then save them.

**\*Tip:** *Append* is not available for files in other format.

✧ ***Rename***

Change the name of the current sound file.

✧ ***Delete***

Delete the current sound file.

✧ ***Delete All***

Delete all the sound files.

✧ ***Settings***

Set the file format and storage location.

✧ ***Send***

Send the current sound file to user profile, MMS or Bluetooth.

## **FM Radio**

Choose the ***FM Radio*** menu, and then turn the broadcasting FM Radio on.

### **Listen to the FM Radio**

Start the FM Radio function, the interface will show the location No., name (if saved) and frequency of the FM Radio channel.

**\*Tips:** To the channels saved, while listening, you can choose the location of the FM Radio channel needed by press the corresponding number.

### **Search channels**

Under the FM Radio interface, press **left key/right key** to swift the channels be in existence in the list, or press the left soft key and enter the Option menu, choose Manual search, input the frequency you need, the FM Radio will search the channel.

Choose Auto search from the option, the FM Radio will search the channels now can received automatically. If the icon is gray, means the keystroke uses as a fine-tuning.

**\*Tips:** Auto search needs some time please be patient.

## Basic Usage

The phone offers you with the FM Radio background play function, to turn off the FM Radio, please press **OK key** and under the FM Radio interface after it turn gray, then quit.

When you want to adjust the volume, press **up key/ down key** to increase/lower volume.

**\*Tips:** When listen to the FM Radio, you can make or answer a call normally. While talking, the volume of the broadcast will into mute automatically.

## File manager

Choose **File manager** from the main menu to open it and you can find the storage devices and the capacity of total space and free space. On different objects, there are different operations.

✧ Storage devices: press **Option** to perform following operations:

<b>Open</b>	List all the folders and files
<b>Create Folder</b>	Create a new folder and edit its name
<b>Format</b>	Format the storage devices, the operation will delete all the data stored in the storage devices

✧ Folders press **Option** to perform following operations:

<b>Open</b>	Show the file tree in this folder and list all files
<b>Create Folder</b>	Create a new folder and edit its name
<b>Rename</b>	Change the folder's name
<b>Delete</b>	Delete the folder
<b>Sort</b>	Arrange the folders or files by <b>name, type, time, size</b> or <b>random</b>

✧ Files: press **Option** to perform following operations:

<b>View</b>	View the image files stored in certain formats; If the phone is nonsupport, it will tip that <b>format error</b> .
<b>Play</b>	For the multi-media files the phone supports, it show the menu; you can play the multi-media files by the menu
<b>Forward</b>	Send the file to user profile, Bluetooth or MMS
<b>Detail</b>	Show the updating time and its size
<b>Rename</b>	Edit the file's name
<b>Copy</b>	Copy this file to any other folder in the same storage device
<b>Move</b>	Move this file to any other folder in the same storage device
<b>Delete</b>	Delete this file
<b>Delete All Files</b>	Delete all the files in current folder
<b>Multitask Operation</b>	Select several files in the folder at the same time to perform the following operations
<b>Sort</b>	Arrange the folders or files by <b>name</b> , <b>type</b> , <b>time</b> , <b>size</b> or <b>random</b>

**\*Tip:** the options may differ depending on the object types.

## Settings

You can set your favorite wallpaper, ring or some other function.

## Dual SIM Settings

This menu offer several usages of dual SIM cards, you can choose the corresponding mode you want.

- Dual SIM open**           Both Dual SIM all standby.
- Only SIM 1 open**       Only use SIM 1 standby.
- Only SIM 2 open**       Only use SIM 2 standby.
- Flight mode**            When selecting this option, mobile's function all close.

## User Profiles

Enter **Settings** → **Profiles** from main menu and there are several profiles that you

can edit the contents as you like: **General**, **Meeting**, **Outdoor**, **Indoor**, **Headset** and **Bluetooth Mode**. Once you pair your phone with an earphone or a Bluetooth device, the **Headset** and **Bluetooth** are automatically activated and meanwhile the profile in use is deactivated.

You can choose any profile as you like and customize the selected one:

**Tone Setup:** Set the incoming call tone, incoming message tone and keypad tone

**Volume:** Set the volume of ring tone and key tone

**Alert Type:** Set ring, vibration only, vibration then ring or ring then vibration

**Ring Type:** Set single ring, repeat ring or ascending ring

**Extra Tone:** Set warning ring and error ring on or off

**Answer Mode:** Set pressing any key to answer except power on/off key and right soft key or not. Set auto answer on or off (only in Headset Mode).

## Phone Setup

Enter **Settings** from main menu, select **Phone Setup** and then you can set following items:

**Time and Date** Set your current time zone, time, date and their display format.

**Schedule Power On/Off** You can set up to 4 time points to automatically turn the phone on and off.

**Language** Set the display language.

**Preferred Input Method** Select the preferred input method as you like.

**Display Characteristic** You can find submenus such as wallpaper, screen saver, power on display, and power off display, back light timer, show date and time, show owner number, show operator name in display characteristic.

**Greeting Message** When power on, the screen will show a few words. Switch on/off this function.

- Navigation key** Setup one-key go to list by you need. Under the sleep mode press the left soft key to enter the list menu.
- Dedicated Key** Set four menus that you can enter directly from idle by press the 4-way navigation key up, down, left and right.
- Back Light Timer** Setup the light of the back light timer.

**\*Note:** Your choice of time zone does not change the time and date you has setup. The setting of Schedule Power On/Off won't be activated if you set the same time for them.

## Network Setup

Enter **Settings** from main menu, select **Network Setup**, you need to choose the SIM card network setup for SIM 1/SIM 2 and then you can perform following operations:

- Network Selection** New search, Select Network, Selection Mode
- Preferred Network** Set the preferred network during searching.

## Security Setup

Enter **Settings** from main menu, select **Security Setup** and then you can perform following operation:

- SIM 1 security setup** You can set SIM lock (PIN code), fixed dial, barred dial and change password for SIM 1.
- SIM 2 security setup** You can set SIM lock (PIN code), fixed dial, barred dial and change password for SIM 2.
- Phone Lock** Set a password for phone lock and the default password is **1234**.
- Auto Keypad Lock** Set auto keypad lock on or off and a time after which the keypad is locked.
- Change Password** Change the Phone Lock Password.

**\*Note:** for Pin Password, please contact your service provider; Fixed Dial and Barred Dial must be supported by your SIM card. For details, please contact your

service provider.

## Restore Factory Settings

Enter **Settings** from main menu, select **Restore Factory Settings** and then you can restore initialized settings for wallpaper, screen saver, ring etc.

## Organizer

Your phone provides you more management tool. Enter from main menu **Organizer**.

## Torch

This phone could also work as an electric torch by opening the main menu **Organizer** → **Torch**; or by setting it as an shortcut use. In the idle screen, You can take a long-press on the **OK KEY** to turn the torch on when it is off, long -press to turn it off when it is on.

## Calendar

The screen shows current date framed by special color box when entering Calendar. Press the 4-way navigation key up, down, left or right to move to different date. Press OK key or left soft key to enter the corresponding menu and you can find View Tasks. Choose Tasks (see 12.3 To do) — add new task — jump to date — weekly check.

## To do

You can schedule and organizer events such as appointments and meetings by **To Do List** in your phone as it always reminds you of the preset tasks on time if your phone is power on. Enter **To Do** from Organizer and you can check all tasks. While the task list is empty, press left soft key to “Add” new tasks or open calendar display, enter **Option** and select **Jump To Date** to add new tasks. While viewing a task, you can also enter Option by pressing left right key to perform following

operation:

### ***View***

View the content of selected task

### ***Add***

Select Add to create a new task. You can edit its date, time, note, alarm mode and reminding mode etc.

### ***Edit Task***

Edit the content of selected task

### ***Delete Task***

Delete the content of selected task

### ***Delete All***

Delete all the tasks

**\*Note:** there is fixed room for storing tasks and when no “Add” shows in “Option”, please delete some indifferent tasks to save room for important ones.

## **Alarm**

Your phone has an alarm clock with 5 separate alarms that you can set to alert you at the time(s) you specify. To set an alarm clock, select one alarm and press left soft key to edit its on/off, time, period, ring and reminding mode.

## **Calculator**

Enter ***Calculator*** menu, you can process simply digital computing. Now the phone becomes your calculator.

## **Unit converter**

The phone provides you the weight and length unit converter function. Entering the parameters, you can convert kilogram into pound or ounce; convert kilometer into mile, meter or yard.

## **Currency converter**

Insert the current rate of exchange, the local currency can be conversed into

foreign currency.

## Stopwatch

Choose **Stopwatch**, there are **Typical Stopwatch** and **Way Stopwatch** for different occasions and following are ways to use them.

**Typical Stopwatch** – there are two ways for your timing, that is **Split Timing** and **Lap Timing**. Enter **View record** to check previous timing records.

**Way Stopwatch** – press start you can time 4 courses by pressing the 4-way navigation key up, down, left and right.

**\*Note:** when you are using Way stopwatch, you can press the **Stop** or **Resume** but only the selected course.

## Bluetooth

The phone provides Bluetooth function, select **Bluetooth** to enter, you can operate as follow:

### **Active Bluetooth Device**

Select to turn on/off the Bluetooth Device, you must turn on the Bluetooth Device of the phone before using it.

### **Inquiry Audio Device**

Select the menu after turning on the Bluetooth, the phone will inquiry the Bluetooth Device within the scope automatically. Please sure that the Bluetooth Device that need to be inquired is power on before inquiring.

### **My Device**

The menu will list all the Bluetooth Device that you inquired and you can select the device you need to perform the operations: **Online**, **Offline**, **Device Name**, **Delete**, **Delete All**, **Search New Device** etc.; also can examine the service list of the device selected.

When use the Bluetooth earphone to listen the MP3, you need to select the Bluetooth headset using in the device listed, enter the **Online** menu and select the **Advanced voice broadcast services**, enter the audio player, you can listen to the

music.

### ***On-line Device***

This menu list the Bluetooth Device connected with your phone now.

### ***Setting***

You can change the Bluetooth Device name, authentication, audio path, FTP setting of the Bluetooth Device; also can turn on/off the inquiry item of the Bluetooth in this menu.

### ***My Bluetooth***

You can examine the Bluetooth Device name, address, supported service etc. in the menu.

## **Fun & Games**

The phone provides you more application software, and it makes you more convenient.

## **Games**

Enter from menu ***Fun & Games*** → ***Games***, the phone provides you many games interesting, which make your life wonderful.

To the rules of the built-in games, you can refer to the notes of the games.

And you can setup the sound and the shock through the game settings.

**\*Note:** you can set easy, normal and hard level in Game Level about some games through ***Game Settings***.

## **Services**

### **WAP**

Your phone can connect to the Internet or run web-based applications by using web browser. If you need, please consult your service provider how to link the

network. Enter from the **WAP** menu.

**\*Note:** Your phone is applicable to the GPRS (General Packet FM Radio Service) network link. Type of the network link depends on your network service provider. This function must be supported by network. For more information about this please contact your network provider.

## Home

Selecting the main menu, you can log on the homepage set up to browse. If you do not set up, you can use the website pre-set by the manufacturer.

## Bookmark

Enter the bookmark menu, the menu list shows all the bookmark exist, Select the **option** button, you can do the following operations to the bookmark selected:

- Goto** Link the website appointed by the bookmark.
- Edit** Edit the name and address of the current bookmark.
- Delete** Delete the bookmark.
- Delete All** Delete all the information of bookmarks.
- Add Bookmark** Add new name and address of the bookmark.
- Send** Transmit the address of the bookmark by message or MMS.

## History

The menu lists the website records your recent visit to facilitate your visit to the site.

## Enter Address

Enter the menu, after inputting the URL address of the WAP service that you want to visit, select the **Option** button and select complete. The phone automatically logs on the website you input.

## Service Inbox

You can check the web service message in this mailbox, and can also process

delete etc.

## Settings

You can select **Settings** menu, then set up the content relates to the WAP service as following:

<b>Select SIM card</b>	Set up the
<b>Edit Profile</b>	Select and start the network configuration file you need, can set up homepage, account and login password etc.
<b>Browser options</b>	Waiting time of viewing the website and figures shown.
<b>Service Message Settings</b>	Turn on/off the reception of the service news.
<b>Clear Cache</b>	Use to clear the records in the cache.
<b>Clear Cookies</b>	Use to clear personal writing data.



**myPhone**

[www.myphone-mobile.com](http://www.myphone-mobile.com)